Is It Here/There Yet?

Real Life Experiences of Generating/Evaluating Extreme Data Sets Around the World

https://www.fairfaxcounty.gov/news2/wp-content/uploads/2016/03/Fire-hydrant-with-water-blur.jpg

https://pluspng.com/img-png/bathtub-png-bathtub-png-1662.png

G. Juckeland, A. Huebl, M. Bussmann

Helmholtz-Zentrum Dresden-Rossendorf

Extreme Data Workshop, Jülich, Sep 18-19, 2018

Our Background

well, one of many...

Dr. Guido Juckeland I g.juckeland@hzdr.de I Computational Science Group I www.hzdr.de/fwcc

Conventional Particle Acceleration

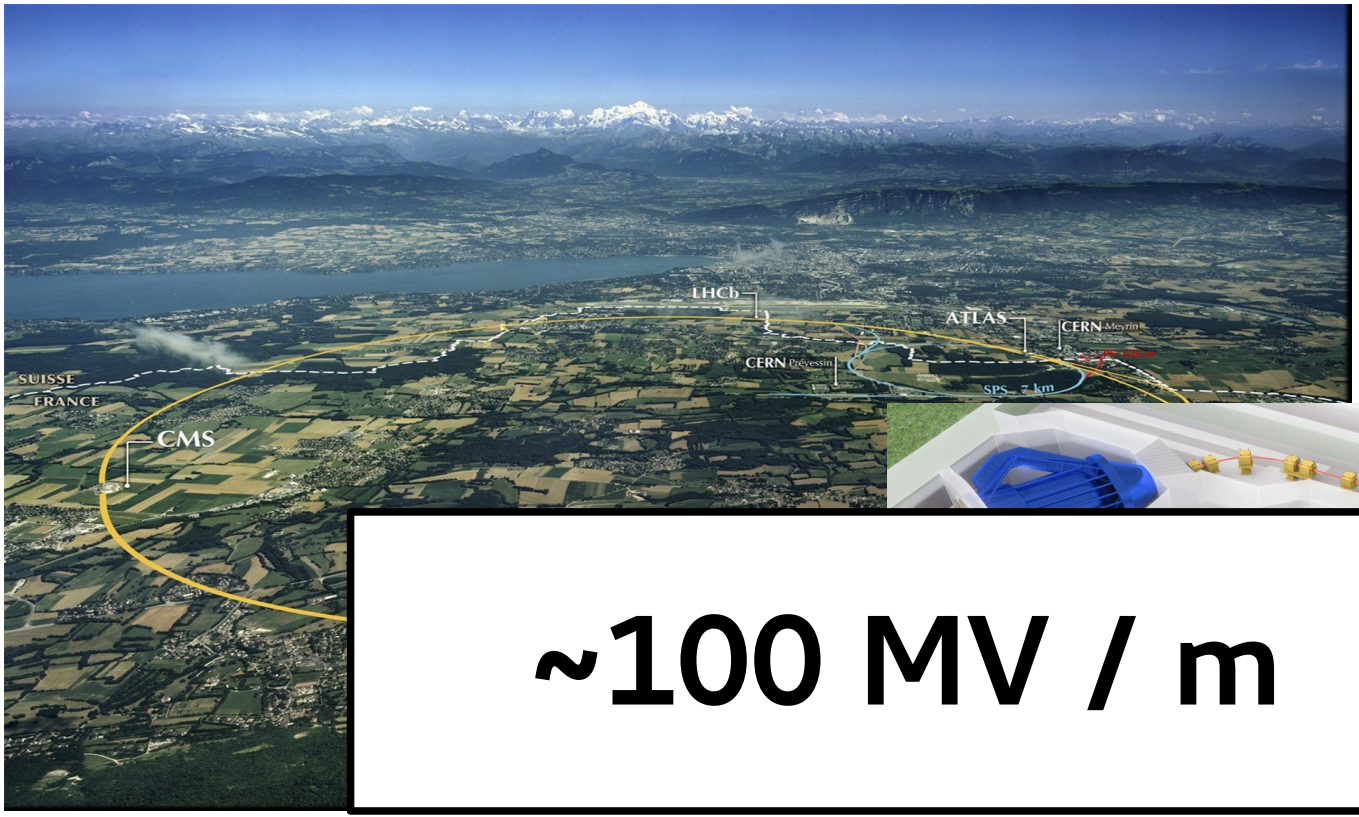

~100 MV / m

(Laser-) Plasma Acceleration

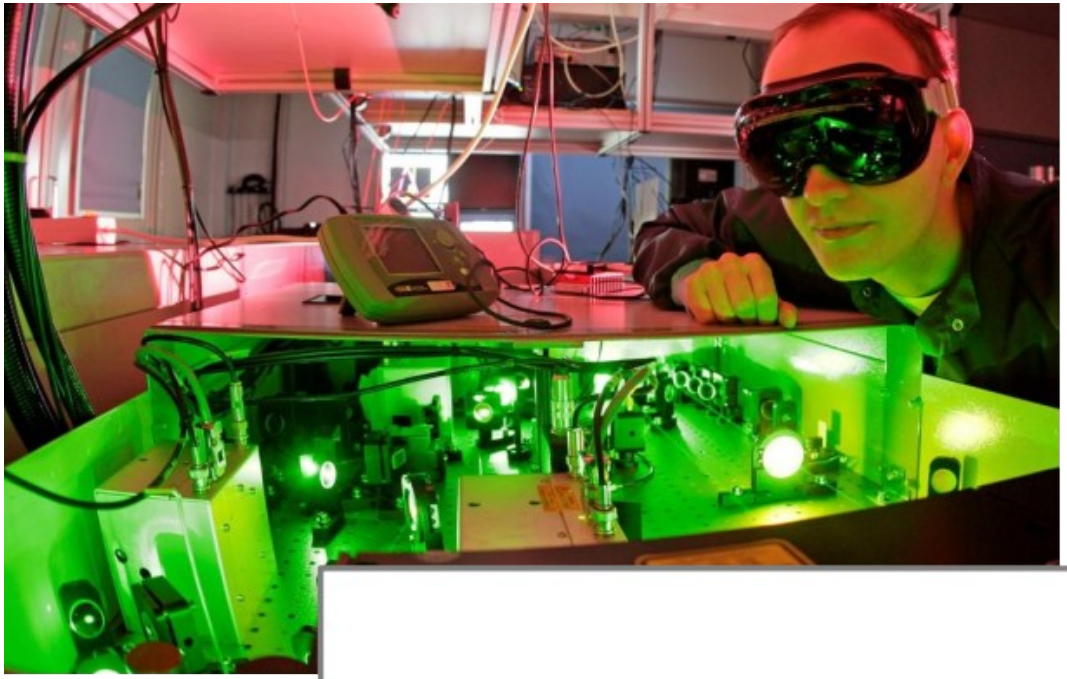

30 – 500 fs
800 – 1053 nm
45 – 200 J

$$I = \frac{PW}{cm^2}$$

50 nm
-
10 mu

1 000 000 MV / m

Laser Plasma Acceleration

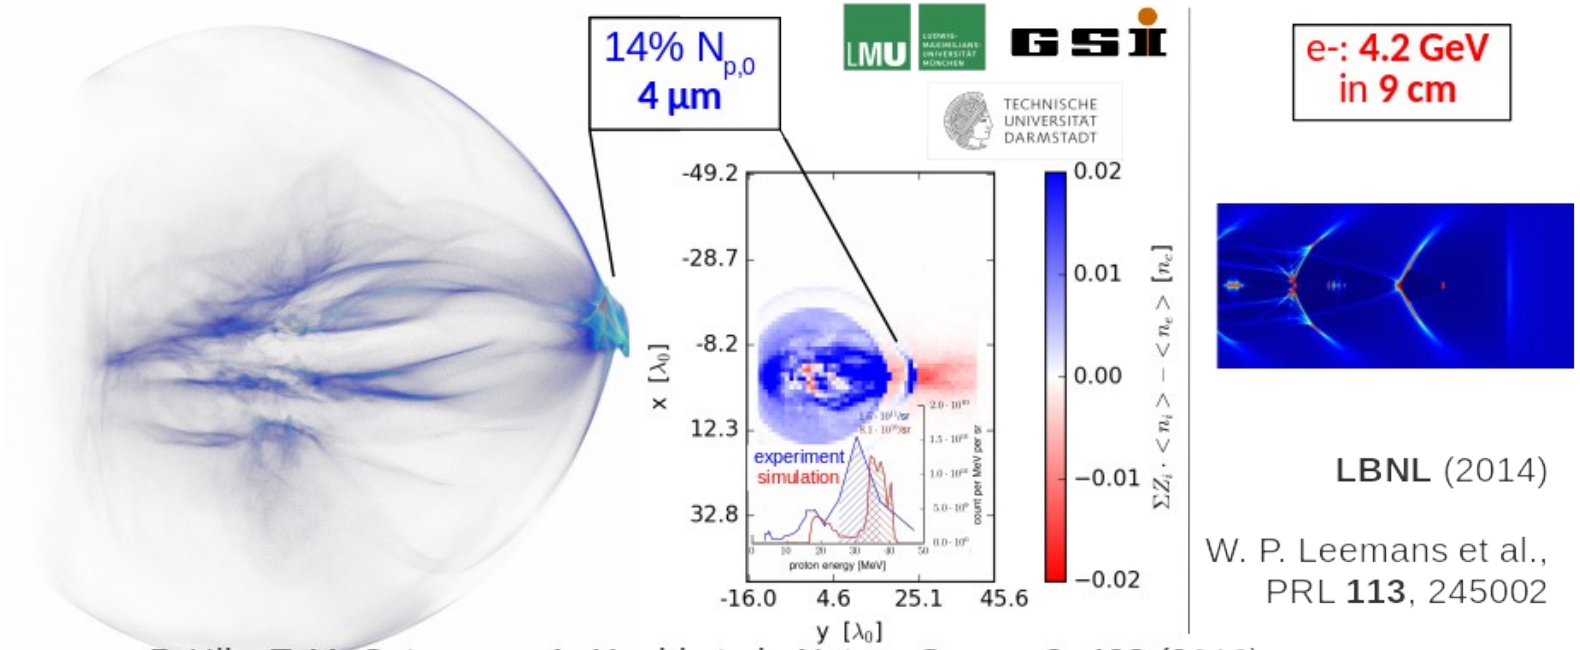

P. Hilz, T. M. Ostermayr, A. Huebl et al., Nature Comm. **9**, 423 (2018)

Particle-in-Cell Simulations

PIConGPU

- Ab initio, electro-magnetic plasmas
- Scaling to the full-size of Titan & Piz Daint
- Gordon Bell finalist 2013

Data Challenges at Extreme Scale

(also coming to your site! Soon.)

Mitglied der Helmholtz-Gemeinschaft
Dr. Guido Juckeland I g.juckeland@hzdr.de I Computational Science Group I www.hzdr.de/fwcc

Typical Post-Processing

A. Huebl et al., DRBSD-1 - ISC'17 (2017),
DOI:10.1007/978-3-319-67630-2_2, arXiv:1706.00522

generate data
measure or sim.

store

post-process

K20x GPU (2013), **bw :=**
6 GByte · 10 Hz steps

PCI-Express: **6 Gbyte/s**
1 / 10 th bw

I/O per node:
1 / 10 th · 1 / 200 th bw
– 42 MByte/s (Titan)
– 29 MByte/s (PizDaint)

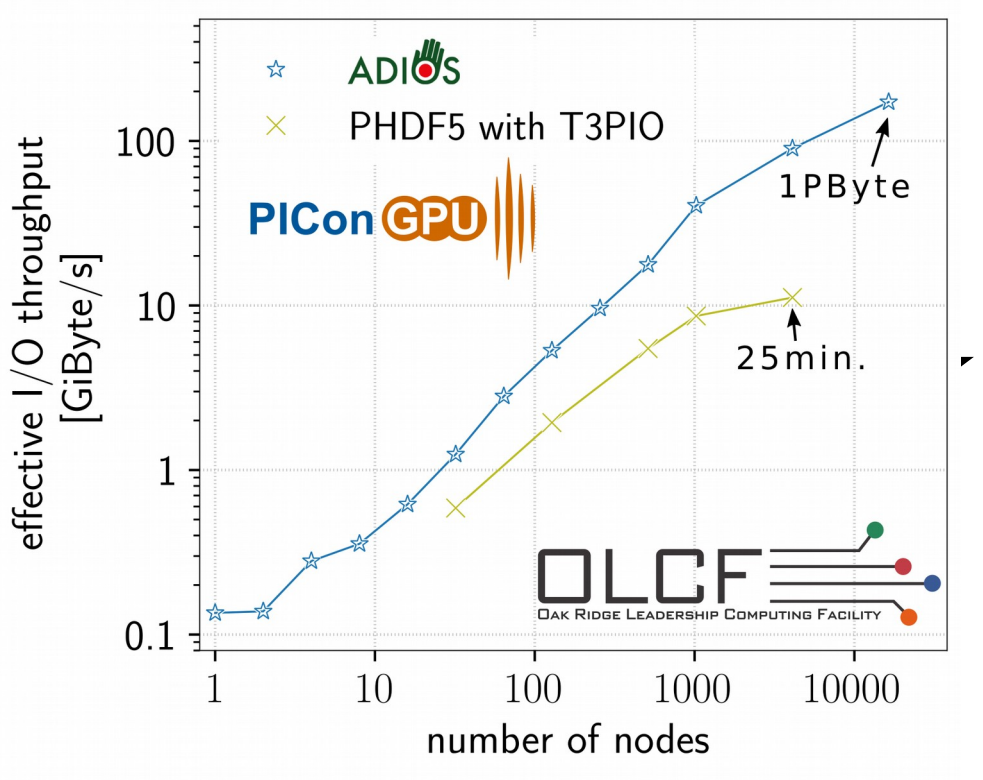

Summit (ORNL, 2018): ratio **4x "worse" - gap of 10^4**

Next-Generation Experiments

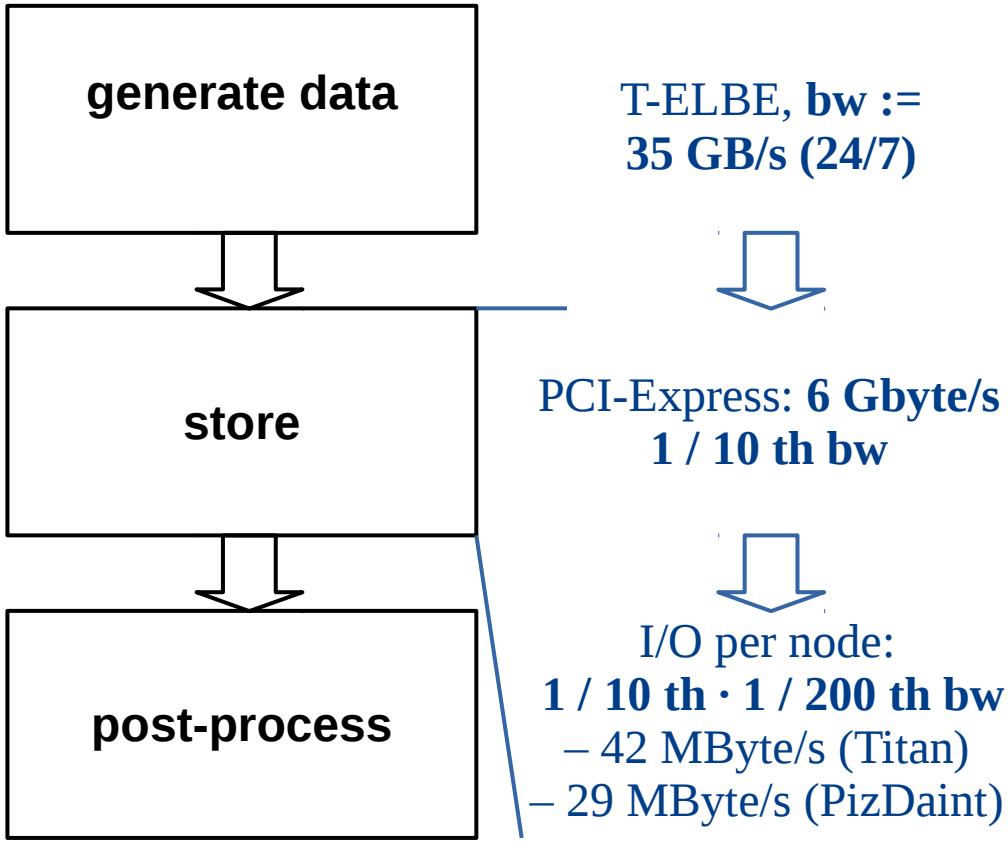

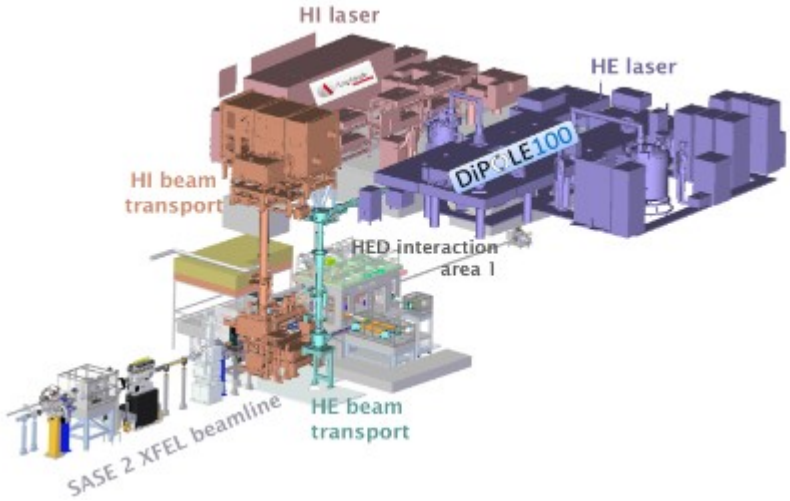

When the Bath-Tub is Full… - Site Storage Policies for >1 PB data sets

	Site A	Site B	Site C
Capacity	250 PByte	6 PByte	3 PByte
Capacity/FLOP	2 Byte/FLOP	0.3 Byte/FLOP	10 Byte/FLOP
Bandwidth	2.5 TB/s	100 GB/s (estd.)	40 GB/s
Bandwidth/FLOP	20 µBye/FLOP	5 µByte/FLOP	133 µByte/FLOP
Retention Time	90 days + archive	30 days	∞

Which to choose??

Potential Solutions

and first steps taken

Dr. Guido Juckeland I g.juckeland@hzdr.de I Computational Science Group I www.hzdr.de/fwcc

On-the-fly Compression

$$\tau_C > \frac{\tau_{FS}}{\tau_{FS} + 1}$$

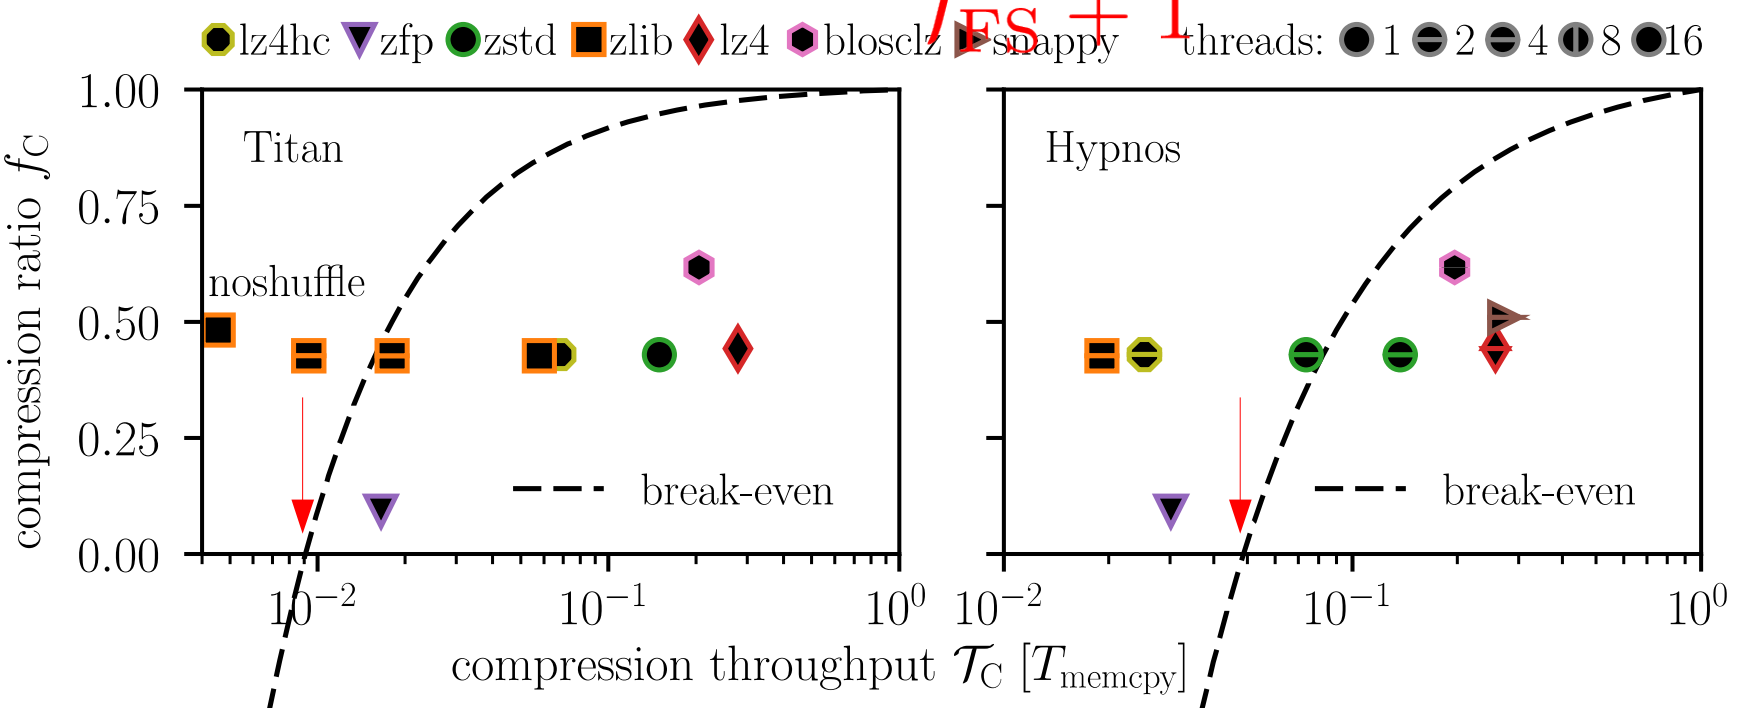

Zfp 0.5.1: three uncompressed bits / scalar; on *particle data*

Blosc 1.11.4-dev: add bitshuffle pre-conditioner

Human In-the-Loop In-Situ Processing

A. Huebl et al. (2014), DOI:10.1109/TPS.2014.2327392
R. Pausch et al. (2017), DOI:10.1103/PhysRevE.96.013316
A. Matthes, A. Huebl et al., ISC'16 (2016), DOI:10.14529/jsfi160403
A. Huebl et al., ISC'17 (2017), DOI:10.1007/978-3-319-67630-2_2

Binning of a **spectrogram**
Creation of a **phase space image**

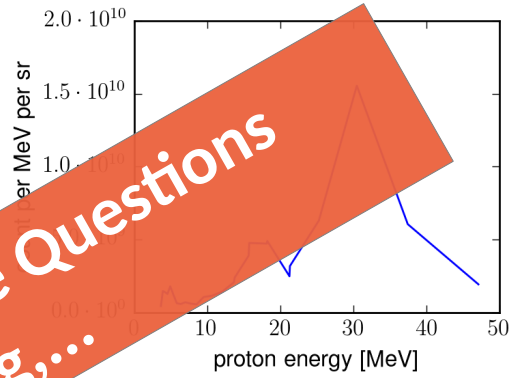

In situ **radiation diagnostics**

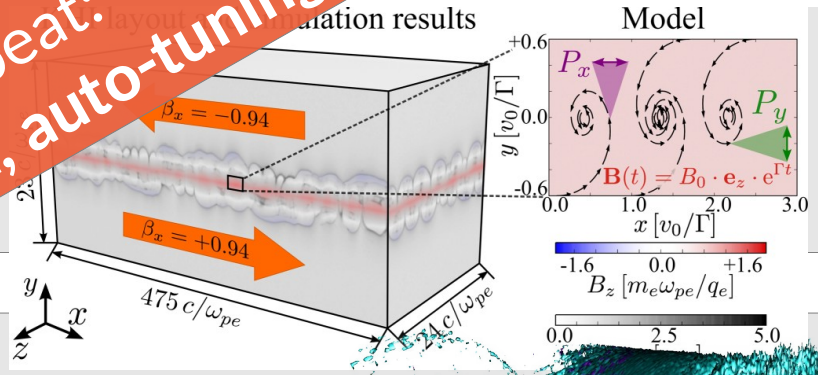

Ray-cast or photo-realistic ray-trace
Lossy data compression

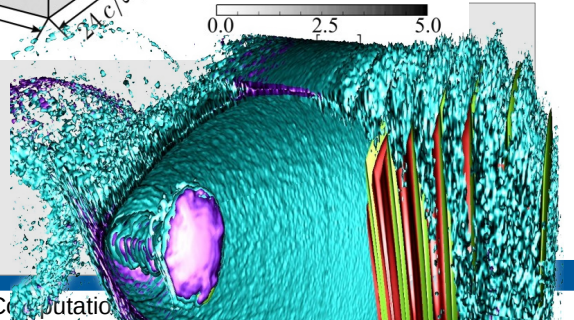

Observe, Correlate & Repeat: Change Questions
Later: Add ML, auto-tuning,...

Dr. Guido Juckeland I g.juckeland@hzdr.de I C

Interactive JIT CUDA/C++/...

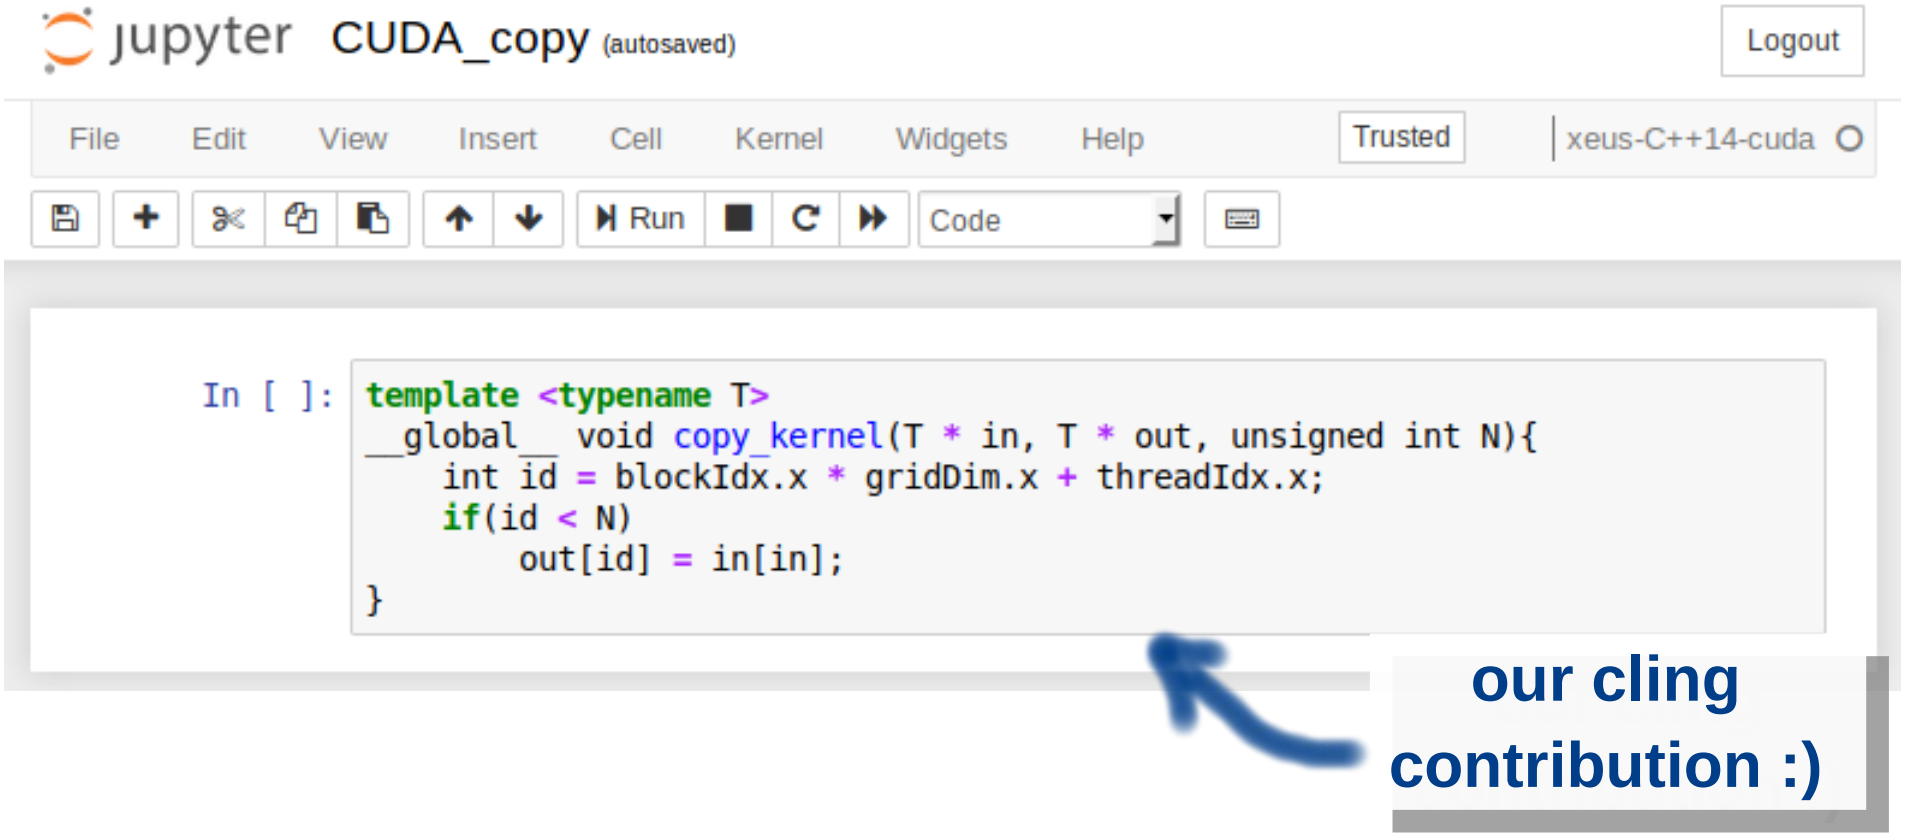

Cling CUDA: S. Ehrig (HZDR, TU Dresden), Diploma Thesis (2018)

Data Transfers between Data Centers

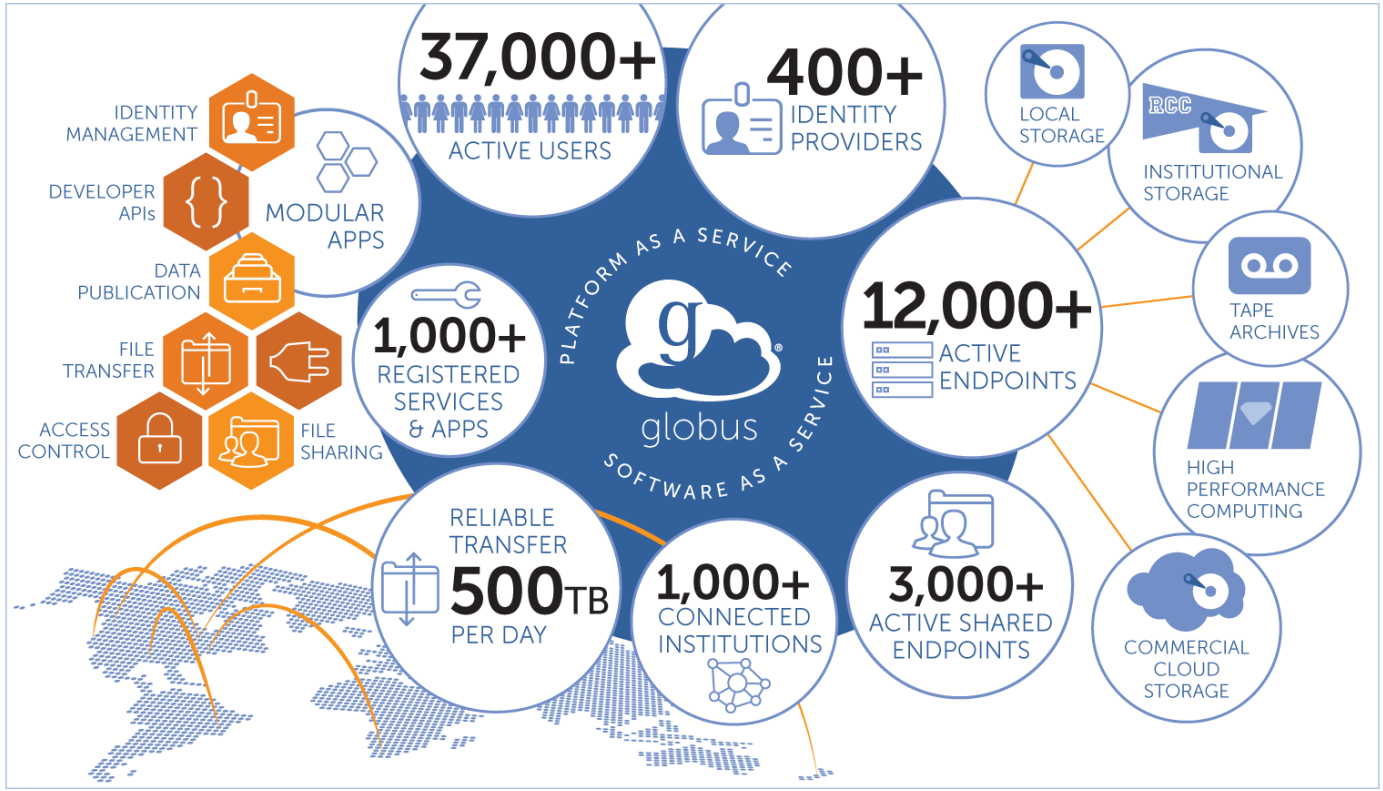

Summary + Outlook

- It‘s hard to know the right <0.01% beforehand in explorative science (bleeding-edge experiments and simulations)
- The data will come (sooner than later)
- In-situ techniques (with or without a human) help producing „good“ data sets

- **Moving data is expensive** – do it at least asynchronously